

# R Series

LED Street Display

**FOCONO**

Your Local  
LED  
Application



## ULTRATHIN DESIGN



easy transportation and save structure cost.

## FRONT-ACCESS SERVICE



Front-access service for  
efficient maintenance.




## IP65 WATERPROOF



The screen can be used outdoor even against bad weather.



## REMOTE GROUP CONTROL

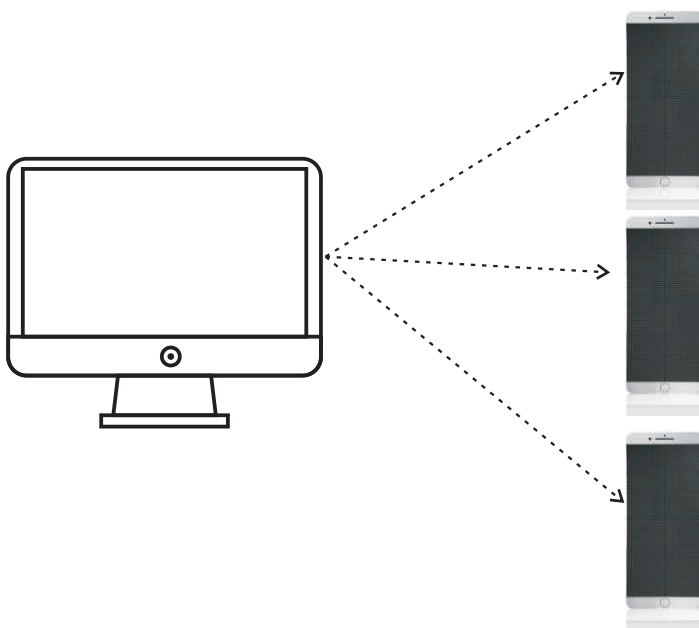

One computer for more screens, keeping all the screen synchronous.

## SMART ON/OFF FUNCTION AUTOMATICALLY



The smart on / off automatically can avoid power consumption waste and save cost.



## PARAMETERS

Value	R6 - I	R8 - I	R6 - II	R8 - II
Pixel pitch	6.4mm	8mm	6.4mm	8mm
Brightness	5500 nits	5500 nits	5500 nits	5500 nits
Pixel configuration	SMD	SMD	SMD	SMD
Colours	281 trillion	281 trillion	281 trillion	281 trillion
Refresh rate	≥2400	≥1920	≥2400	≥1900
Pixel matrix per panel	160X320	128X256	120X240	96X192
Pixel matrix per sq.m	24414	15626	24414	15625
Viewing angle ( H/V)	140/140 deg.	140/140 deg.	140/140 deg.	140/140 deg.
Power consumption (max/avg)	870/300W/sq.m	890/310W/sq.m	870/300W/sq.m	890/310W/sq.m
IP rate	IP65/IP43	IP65/IP43	IP65/IP43	IP65/IP43
Input voltage (AC)	110/240	110/240	110/240	110/240
Panel size(L x W x H)	1024X2048X150mm	1024X2048X150mm	768X1536X150mm	768X1536X150mm
Panel weight(Alu.)	76kgs	76kgs	47kgs	47kgs

## Applications

Pedestrian street, light box, highway, community, etc.

