

X Series


Outdoor Stage / Rental LED Display

FOCONO

Your Local
LED
Application



LIGHT AND THINNER

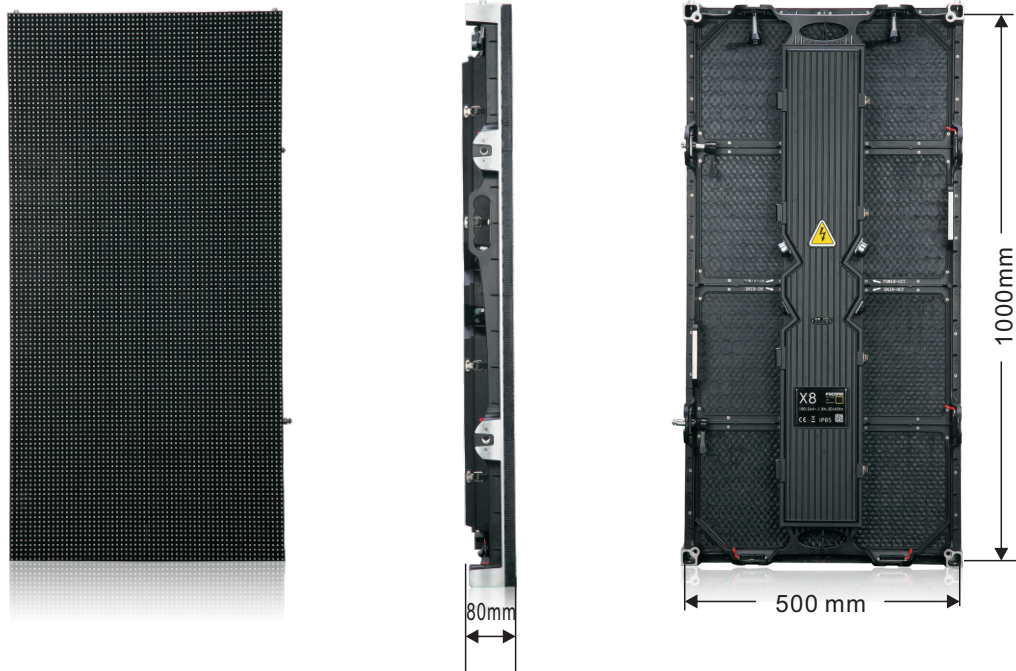


Easy for installation, cost-effective for transportation.

FAST ASSEMBLING




Cabinet locking system can connect the cabinet without any tools, quick installation within 8 seconds.

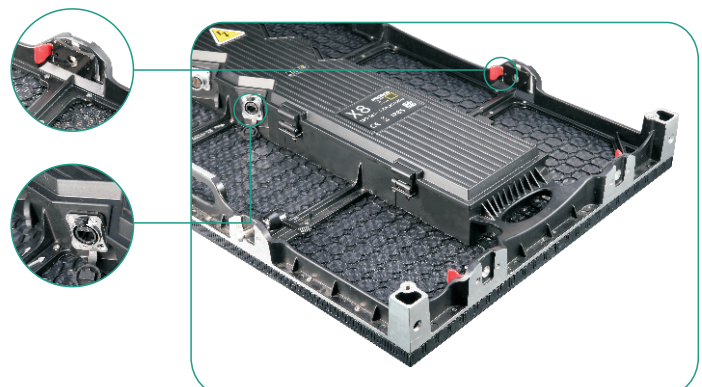

MISTAKE TRACKING SYSTEM



Faster and easier
problem shooting.

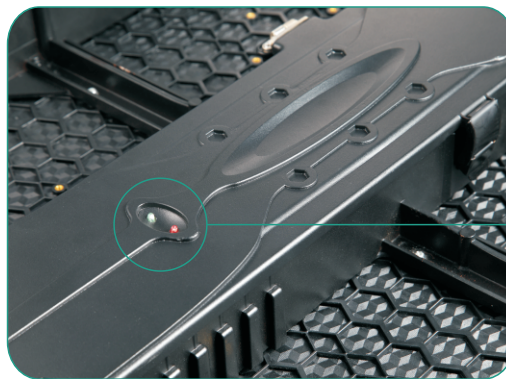

ZERO NOISE DESIGN



No fan design
No noise

4"H" PERFORMANCE

4H

High brightness: 1500nits ; High gray scale: 65536 levels ;
High refresh rate: 1000Hz; High contrast ratio: 2000:1.

PARAMETERS

Value	X6	X8	X10
Pixel pitch	6.25mm	8.33mm	10.42mm
Brightness	5000 nits	5000 nits	5000 nits
Pixel configuration	SMD	SMD	SMD
Colours	281 trillion	281 trillion	281 trillion
Refresh rate	≥1440	≥1920	≥1920
Pixel matrix per panel	80X160	60X120	48X96
Pixel matrix per sq.m	25600	14400	9216
Viewing angle (H/V)	140/140 deg.	140/140 deg.	140/140 deg.
Power consumption (max/avg)	600/210 W/sq.m	800/280 W/sq.m	800/280W/sq.m
IP rate	IP65/IP43	IP65/IP43	IP65/IP43
Input voltage (AC)	110/240	110/240	110/240
Panel size(L x W x H)	500X1000X80mm	500X1000X80mm	500X1000X80mm
Panel weight	11kgs	14kgs	15kgs

Applications

Outdoor commercial advertising,
Sport,Event,Concert,Musical
festival,Entertainment etc. rental
occasions.

