Series


Indoor Stage / Rental LED Display





LIGHT AND THINNER



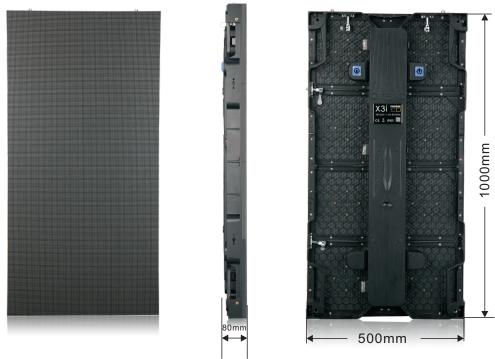

Easy for installation, cost-effective for transportation.

FAST ASSEMBLING



Cabinet locking system can connect the cabinet without any tools, quick installation within 8 seconds.



www.focono.com -



MISTAKE TRACKING SYSTEM



Faster and easier problem shooting.



ZERO NOISE DESIGN







No fan design No noise





4"H" PERFORMANCE



High brightness: 1500nits; High gray scale: 65536 levels;

High refresh rate: 1440Hz; High contrast ratio: 2000:1.

PARAMETERS

Value	X3i	X6i
Pixel pitch	3.91mm	6.25mm
Brightness	1100 nits	1500 nits
Pixel configuration	SMD	SMD
Colours	281 trillion	281 trillion
Refresh rate	≥1440	≥1440
Pixel matrix per panel	128X256	80X160
Pixel matrix per sq.m	65536	25600
Viewing angle (H/V)	140/140 deg.	140/140 deg.
Power consumption (max/avg)	600/210 W/sq.m	600/210 W/sq.m
IP rate	IP40/IP20	IP40/IP20
Input voltage (AC)	110/240	110/240
Panel size (L x W x H)	500X1000X80mm	500X1000X80mm
Panel weight	11kgs	11kgs

Applications

Outdoor commercial advertising, Sport, Event, Concert, Musical festival, Entertainment etc. rental occasions.



www.focono.com











Focono Optoelectronics Company Limited Address: 701 Building A, Dezhong Industrial Park, Shibei Road, Bantian, Longgang District, Shenzhen, China Tel: 86 755 8178 9418 Fax: 86 755 8934 5780

E-mail: focono@focono.com