

# S Series

Indoor Rental LED Display

**FOCONO**

Your Local  
LED  
Application




## LIGHT AND THINNER




The magnalium material makes the cabinet 20% lighter than before.


## CURVE-SHAPED ASSEMBLING OPTIONAL



Can be shaped into curved screen and 10 degree plus or minus tolerance for both external arc and internal arc.

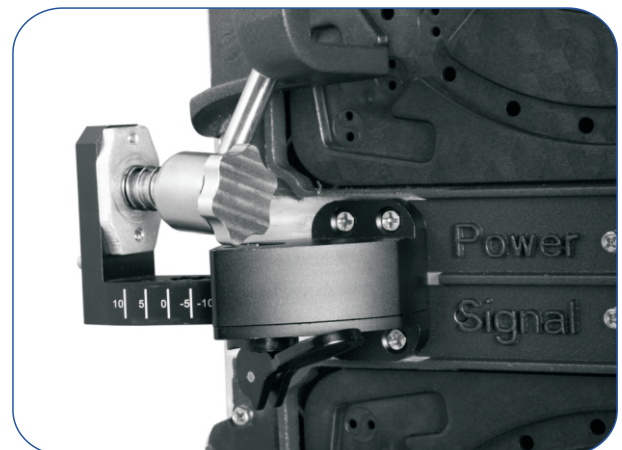

## FAST ASSEMBLING




The side-lock assures the cabinet joint within 8 seconds.

## MISTAKE TRACKING SYSTEM



Visible mistake tracking function.

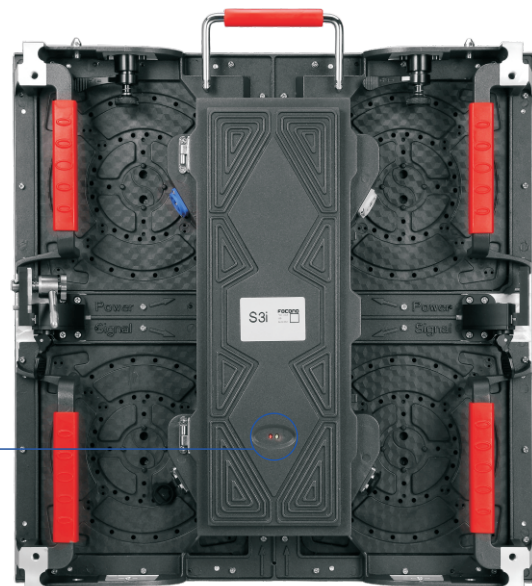

# 4"H" PERFORMANCE



Vivid picture



High refresh rate

High brightness: 1500nits ;  
High gray scale: 65536 levels ;  
High refresh rate: 1000Hz;  
High contrast ratio:2000:1 .

## PARAMETERS

Value	S3i	S6i
Pixel pitch	3.91mm	6.25mm
Brightness	1200 nits	1500 nits
Pixel configuration	SMD	SMD
Colours	281 trillion	281 trillion
Refresh rate	≥1440	≥1440
Pixel matrix per panel	128X128	80X80
Pixel matrix per sq.m	65536	25600
Viewing angle ( H/V)	140/140 deg.	140/140 deg.
Power consumption (max/avg)	600/210 W/sq.m	600/210 W/sq.m
IP rate	IP40/IP20	IP40/IP20
Input voltage (AC)	110/240	110/240
Panel size(L x W x H)	500X500X80mm	500X500X80mm
Panel weight	8.2kgs	8.2kgs

## Applications

Temporary stage, TV studio,  
nightclub & bar, theater, school,  
conference room, hotel,  
shopping mall, events, etc.

